


Reflekt® Lean Datasheet

Highly Reflective Fluoropolymer Based Backsheets for Type 2 Modules

MATERIAL COMPOSITION

TEST:	RESULTS:
Thickness*	269 µm
Width Range	51 - 1700 mm
Weight	310 g/m ²
Density	1.11 g/cm ³
Coating Color (air side)	White
Polyolefin Color Options (cell side)	All Colors**

FLUOROPOLYMER COATING / PET / POLYOLEFIN

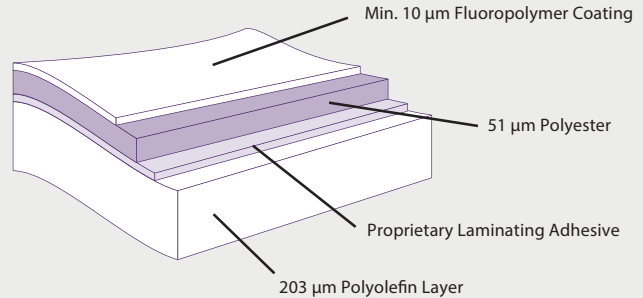

TECHNICAL CHARACTERISTICS

TEST:	TEST SPECIFICATION(S):	RESULTS:
Tensile Strength at Break (MD)	Internal Testing - Data Available	45 MPa (MD) / 50 MPa (TD)
Elongation at Break (MD)	Internal Testing - Data Available	125% (MD) / 63% (TD)
Dimensional Stability	150° C for 30 min; Internal Testing - Data Available	1%
Polyolefin Peel Strength from Encapsulant	Internal Testing - Data Available	40 N/cm
Peel Strength of Layers	PET/Polyolefin	5 N/cm
Reflectance Range	400-700 nm	90%
Relative Thermal Index (RTI)	Suitable for continuous use at 85°C	105° C

WEATHERABILITY TESTING PERFORMANCE

TEST:	TEST SPECIFICATION(S):	RESULTS:
Damp Heat Testing	85° C, 85% RH IEC 61215	1000 Hours
Heat Freeze Humidity	UL 1703, >10 cycles	>70% of initial mechanical properties retained
UV Stability	UL 746C	2000 Hours
MVTR	ASTM F1249	1.5 g/m ² per day

ELECTRICAL INSULATION TESTING PERFORMANCE

TEST:	TEST SPECIFICATION(S):	RESULTS:
Partial Discharge	IEC-60664, IEC-61730	1000 VDC
Dielectric Strength	UL 746A	21 kV
Comparative Tracking Index (CTI)		PLC-0 (600V)

FLAME RESISTANCE TESTING PERFORMANCE

TEST:	TEST SPECIFICATION(S):	RESULTS:
Flame Spread Index	ASTM E162	57
High Current Arc Ignition (HAI)	Exposed to 150 arcs with no ignition	PLC-0

*Theoretical nominal

**Use of Non-white Polyolefin will not provide the specified reflectance

This product is covered by one or more U.S. patents and pending U.S. and other patent applications.
Typical Data - Not Specification



TUV / VDE
PD Cert.



Tomark-Worthen
64 Watkin Ave
Chadds Ford, PA 19317
USA

Phone: 1-610-978-1889
Email: info@tomark-worthen.com
www.tomark-worthen.com

TOMARK  **WORTHEN**